




- Water-resistant.
- No mastic or tape required.
- No torches or heat required.
- Simple and fast installation, no tools required.
- Accommodates size ranges from 11.6mm 84.3mm.
- Seals tight, retains resiliency and pressure even after prolonged years of ageing and exposure.


Ordering Information

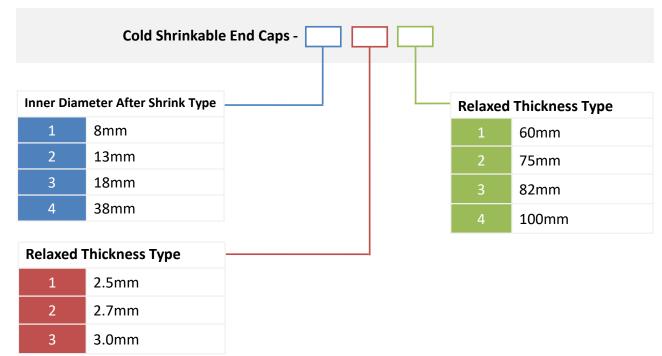

Specification	FCST-FM1	FCST-FM2	FCST-FM3	FCST-FM4
Inner Diameter	25mm	35mm	55mm	90mm
Before Shrink	(0.984'')	(1.378'')	(2.165")	(3.543'')
Inner Diameter	8mm	13mm	18mm	38mm
After Shrink	(0.315'')	(0.512'')	(0.709'')	(1.496'')
Unrelaxed Length	50mm	65mm	72mm	90mm
	(1.969'')	(2.559'')	(2.835'')	(3.543'')
Relaxed Length	60mm	75mm	82mm	100mm
	(2.362'')	(2.953'')	(3.228'')	(3.937'')
Relaxed Thickness	2.5mm	2.7mm	3.0mm	3.0mm
	(0.098'')	(0.106'')	(0.118'')	(0.118'')
Min. Applicable Size	11.6mm	15.9mm	26.0mm	45.5mm
	(0.457'')	(0.626'')	(1.024'')	(1.791'')
Max Applicable Size	20.9mm	30.1mm	49.2mm	84.3mm
	(0.823'')	(1.185'')	(1.937'')	(3.319'')



Fiber Cable Solution Technology Co.,Ltd.

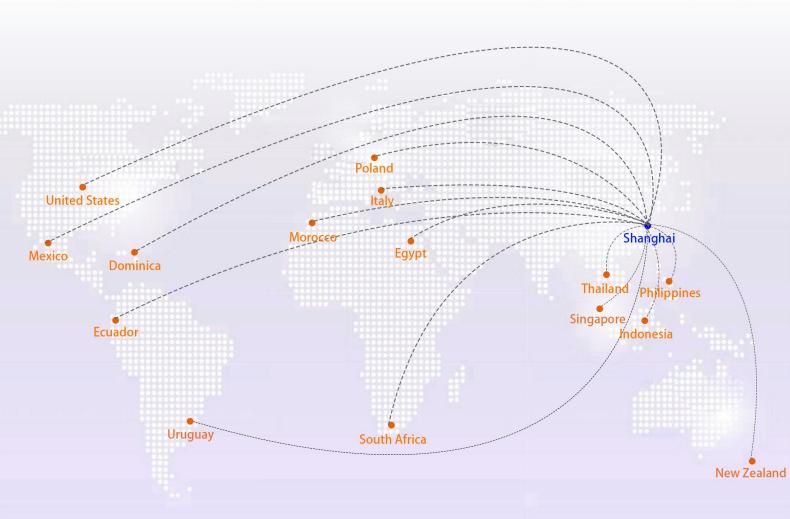

Overseas Agency



www.fcst.com www.micro-duct.com



FCST - Better FTTx, Better Life.

At FCST, we manufacture top-quality microduct connectors, microduct closure, telecom manhole chambers and fiber splice boxes since 2003. Our products boast superior resistance to failure, corrosion, and deposits, and are designed for high performance in extreme temperatures. We prioritize sustainability with mechanical couplers and long-lasting durabili -ty.

FCST aspires to a more connected world, believing everyone deserves access to high-speed broadband. We're dedicat -ed to expanding globally, evolving our products, and tackling modern challenges with innovative solutions. As technology advances and connects billions more devices, FCST helps developing regions leapfrog outdated technologies with sustainable solutions, evolving from a small company to a global leader in future fiber cable needs.

Rm402 block A Watts gallop tower No.2816 YiXian Rd, BaoShan District, Shanghai 200441. Tel:+86-21-38726791 +86-21-38726792 Fax:+86-21-38726793